


Inductive Proportional Sensor



Product image

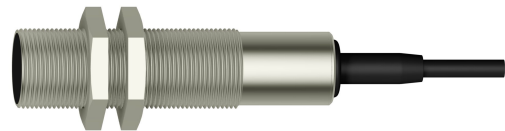

Technical parameters

Axial Working Area Sd 2.4 mm	Steepness 4 V/mm
Temperature Drift 3 ?m/K	Output analog (PNP)
Housing Nickel Plated Brass	Nominal Voltage Un 24 VDC
Supply Voltage Uc 18-30 VDC	Supply Current Ic < 5 mA
Output Voltage Uz 1-9 VDC	Load Resistance Rz ? 500 ?
Short Circuit Resistance no	Overpoling Resistance conditioned
Ambient Temperature Range 0°C...+70°C	Protection IP 68
Connection Type cable PVC 3 x 0,25 mm ² ; 2 m	Order Reference Number PSI P 186 894

Dimensions

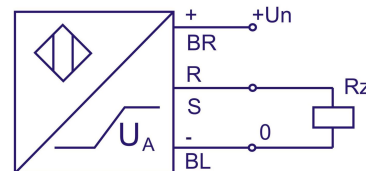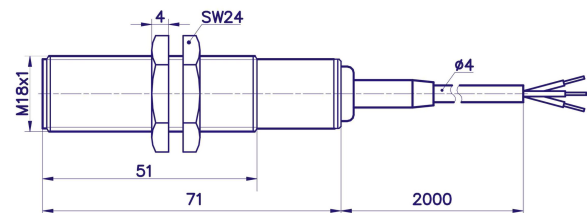

BR - brown
S - black
BL - blue

Company Head Office

PLOSKON AT s.r.o.
Jesenná 1
080 01 Prešov
Slovak Republic

Telephone

+421 / (0)51 7732 836
+421 / (0)51 7731 003

E-mail

obchod@ploskon.sk

Website

www.ploskon.sk

Billing information

PLOSKON AT s.r.o.
I?O:36483354
DI?:2020009860