

PDI 063 412 S

Inductive Proximity Sensors

Product image



Technical parameters

Nominal Sensing Distance S_n
3 mm

Effective Sensing Distance S_r
2,4 - 3,6 mm

Housing Dimensions
 \varnothing 6,5

Mounting
Non-Flush

Hysteresis
(0,1 - 0,15) x S_n

Nominal Voltage U_n
24 VDC

Supply Voltage U_c
10 - 30 VDC

Supply Current I_c
< 10 mA

Output Current I_z
 \leq 200 mA

Switching Frequency
50 Hz

Short-Circuit Protection
Yes

Polarity Reversal Protection
Yes

Output Type
NPN nc

Housing Material
Nickel Plated Brass



Ambient Temperature Range T
-25°C...+70°C

Target Presence Indicator
LED

Output Type
Connector M8

Protection Standard
IP 67

Dimensions

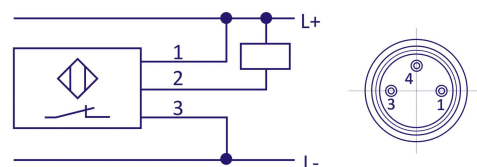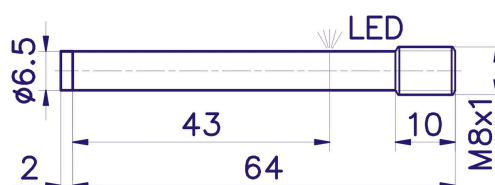

Company Head Office Telephone

PLOSKON AT s.r.o.
Jesenná 1
080 01 Prešov
Slovak Republic

+421 / (0)51 7732 836
+421 / (0)51 7731 003

E-mail

obchod@ploskon.sk

Website

www.ploskon.sk

Billing information

PLOSKON AT s.r.o.
IČO:36483354
DIČ:2020009860