


PSI 128 412 F

Inductive Proximity Sensors



Product image



Technical parameters

| | |
|---|--|
| Nominal Sensing Distance Sn 3,5 mm | Effective Sensing Distance Sr 3 - 4 mm |
| Housing Dimensions M12 | Mounting Non-Flush |
| Hysteresis (0,1 -0,15) x Sn | Nominal Voltage Un 24 VDC |
| Supply Voltage Uc 10 - 30 VDC | Supply Current Ic < 10 mA |
| Output Current Iz ≤ 200 mA | Switching Frequency 1 kHz |
| Short-Circuit Protection Yes | Polarity Reversal Protection Yes |
| Output Type NPN nc | Housing Material Nickel Plated Brass |
| Ambient Temperature Range T -25°C...+70°C | Target Presence Indicator LED |
| Output Type Connector M12 | Protection Standard IP 67 |

Dimensions

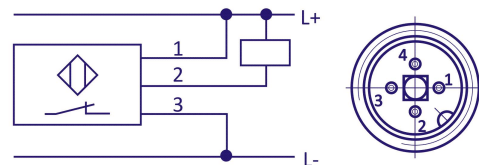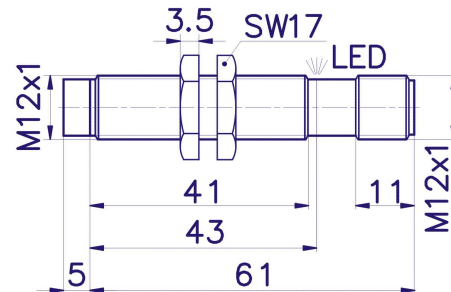

Company Head Office Telephone

PLOSKON AT s.r.o. +421 / (0)51 7732 836
 Jesenná 1 +421 / (0)51 7731 003
 080 01 Prešov
 Slovak Republic

E-mail

obchod@ploskon.sk

Website

www.ploskon.sk

Billing information

PLOSKON AT s.r.o.
 IČO:36483354
 DIČ:2020009860