


PSI 087 314 35 F

Inductive Proximity Sensors



Product image

Technical parameters

Nominal Sensing Distance Sn	Effective Sensing Distance Sr
1,5 mm	1,2 - 1,8 mm
Housing Dimensions	Mounting
M8	Non-Flush
Hysteresis	Nominal Voltage Un
(0,1 -0,15) x Sn	24 VDC
Supply Voltage Uc	Supply Current Ic
10 - 30 VDC	< 10 mA
Output Current Iz	Switching Frequency
≤ 200 mA	1 kHz
Short-Circuit Protection	Polarity Reversal Protection
Yes	Yes
Output Type	Housing Material
PNP nc	Nickel Plated Brass
Ambient Temperature Range T	Target Presence Indicator
-25°C...+70°C	LED
Output Type	Cable Length
Cable PVC 3 x 0,25 mm ²	2 m
Protection Standard	
IP 68	



Dimensions

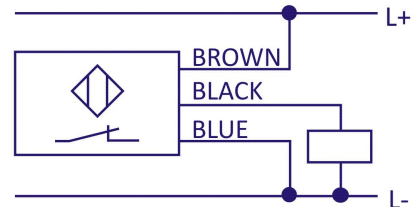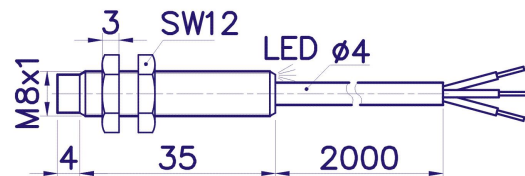

Company Head Office Telephone

PLOSKON AT s.r.o. +421 / (0)51 7732 836
 Jesenná 1 +421 / (0)51 7731 003
 080 01 Prešov
 Slovak Republic

E-mail

obchod@ploskon.sk

Website

www.ploskon.sk

Billing information

PLOSKON AT s.r.o.
 IČO:36483354
 DIČ:2020009860