


PAS 126 314 F

Inductive Proximity Sensors



Product image



Technical parameters

Nominal Sensing Distance S_n 2,5 mm	Effective Sensing Distance S_r 2 - 3 mm
Housing Dimensions M12	Mounting Flush
Hysteresis (0,1 -0,15) x S _n	Nominal Voltage U_n 24 VDC
Supply Voltage U_c 10 - 30 VDC	Supply Current I_c < 10 mA
Output Current I_z ≤ 200 mA	Switching Frequency 5 kHz
Short-Circuit Protection Yes	Polarity Reversal Protection Yes
Output Type PNP nc	Housing Material Nickel Plated Brass
Ambient Temperature Range T -25°C...+70°C	Target Presence Indicator LED
Output Type Cable PVC 3 x 0,25 mm ²	Cable Length 2 m
Protection Standard IP 68	

Dimensions

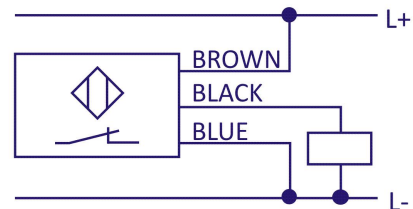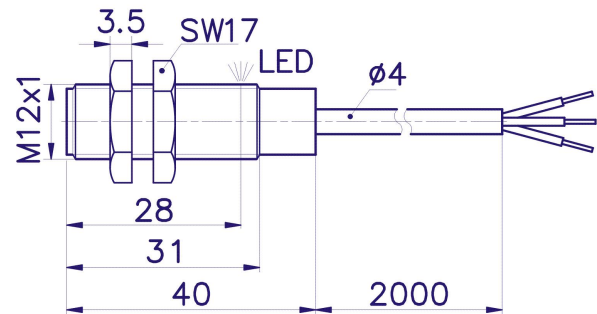

Company Head Office Telephone

PLOSKON AT s.r.o.
Jesenná 1
080 01 Prešov
Slovak Republic

E-mail

obchod@ploskon.sk

Website

www.ploskon.sk

Billing information

PLOSKON AT s.r.o.
IČO:36483354
DIČ:2020009860