


POS 287 6 411 B

Optical Liquid Level Sensors for Elevated Temperatures




Product image



Technical parameters

Nominal Voltage Un 24 VDC	Supply Voltage Uc 12 - 30 VDC
Supply Current Ic < 25 mA	Output Current Iz ≤ 200 mA
Switching Frequency 35 Hz	Short-Circuit Protection Yes
Polarity Reversal Protection Yes	Maximum Operating Pressure 2 MPa
Output Type NPN no	Housing Material Stainless Steel AISI 316L
Operating Temperature - Process -25°C...+140°C	Operating Temperature - Ambient -25°C...+80°C
Output Indicator LED	Output Type Connector M12
Cable Length 2 m	Protection Standard IP 67
Sensing Tip Material Borosilicate Glass	Use Foamy liquids (e.g. beer, sodas), "does not see the foam"

Dimensions

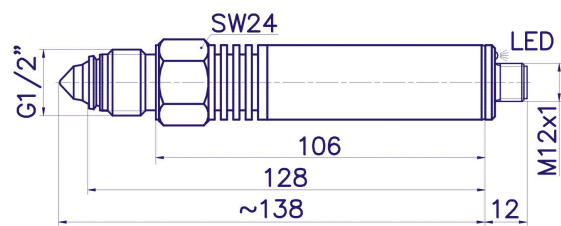

Company Head Office Telephone

PLOSKON AT s.r.o.
Jesenná 1
080 01 Prešov
Slovak Republic

E-mail

obchod@ploskon.sk

Website

www.ploskon.sk

Billing information

PLOSKON AT s.r.o.
IČO:36483354
DIČ:2020009860