POS 287 6 413

Optical Liquid Level Sensors for Elevated Temperatures

Technical parameters

Nominal Voltage Un
24 VDC

Supply Voltage Uc
12 – 30 VDC

Supply Current Ic
< 25 mA

Output Current Iz
? 200 mA

Switching Frequency
35 Hz

Short-Circuit Protection
Yes

Polarity Reversal Protection
Yes

Maximum Operating Pressure
2 MPa

Output Type
PNP no

Housing Material
Stainless Steel AISI 316L

Sensing Tip Material
Borosilicate Glass

Operating Temperature – Process
-25°C…+140°C

Operating Temperature – Ambient
-25°C…+80°C

Output Indicator
LED

Output Type
Connector M12

Protection Standard
IP 67

Use
Oils, neutral liquids (e.g. water and water based liquids, industrial alcohol).

Product image



Dimensions

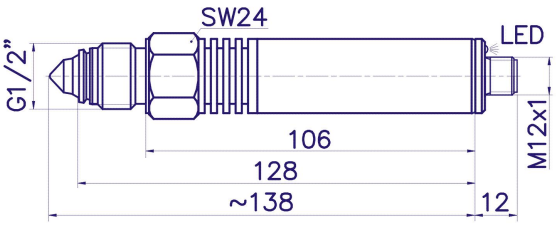

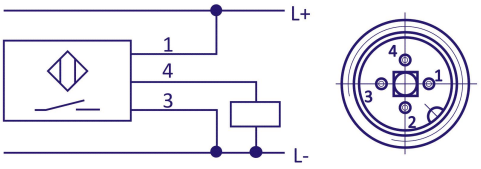

Company Head Office
PLOSKON AT s.r.o.
Jesenná 1
080 01 Prešov
Slovak Republic

Telephone
+421 / (0)51 7732 836
+421 / (0)51 7731 003

E-mail
obchod@ploskon.sk

Website
www.ploskon.sk

Billing information
PLOSKON AT s.r.o.
I?O:36483354
DI?:2020009860