


POS 287 6 314

Optical Liquid Level Sensors for Elevated Temperatures



Technical parameters

Nominal Voltage Un 24 VDC	Supply Voltage Uc 12 - 30 VDC
Supply Current Ic < 25 mA	Output Current Iz ≤ 200 mA
Switching Frequency 35 Hz	Short-Circuit Protection Yes
Polarity Reversal Protection Yes	Maximum Operating Pressure 2 MPa
Output Type PNP nc	Housing Material Stainless Steel AISI 316L
Sensing Tip Material Borosilicate Glass	Operating Temperature - Process -25°C...+140°C
Operating Temperature - Ambient -25°C...+80°C	Output Indicator LED
Output Type Cable PUR 3 x 0,25 mm ²	Cable Length 2 m
Protection Standard IP 68	Use Oils, neutral liquids (e.g. water and water based liquids, industrial alcohol).

Product image



Dimensions

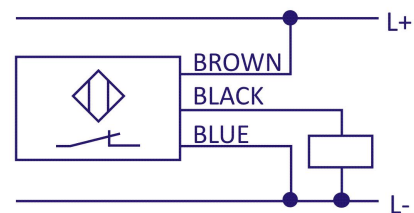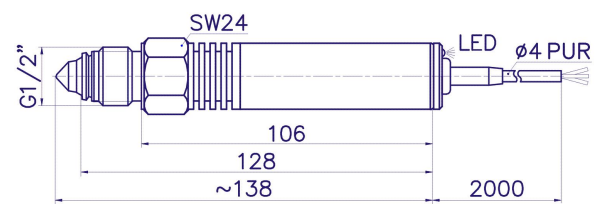

Company Head Office Telephone

PLOSKON AT s.r.o.
Jesenná 1
080 01 Prešov
Slovak Republic

+421 / (0)51 7732 836
+421 / (0)51 7731 003

E-mail

obchod@ploskon.sk

Website

www.ploskon.sk

Billing information

PLOSKON AT s.r.o.
IČO:36483354
DIČ:2020009860