

# POS 187 3 311

Optical Liquid Level Sensors for Standard Temperatures



## Technical parameters

<b>Nominal Voltage Un</b> 24 VDC	<b>Supply Voltage Uc</b> 12 - 30 VDC
<b>Supply Current Ic</b> < 25 mA	<b>Output Current Iz</b> ≤ 200 mA
<b>Switching Frequency</b> 35 Hz	<b>Short-Circuit Protection</b> Yes
<b>Polarity Reversal Protection</b> Yes	<b>Maximum Operating Pressure</b> 2 MPa
<b>Output Type</b> NPN no	<b>Housing Material</b> Stainless Steel AISI 303
<b>Sensing Tip Material</b> Borosilicate Glass	<b>Operating Temperature - Process</b> -25°C...+100°C
<b>Operating Temperature - Ambient</b> -25°C...+80°C	<b>Output Indicator</b> LED
<b>Output Type</b> Cable PVC 3 x 0,25 mm <sup>2</sup>	<b>Cable Length</b> 2 m
<b>Protection Standard</b> IP 68	<b>Use</b> Oils, neutral liquids (e.g. water and water based liquids, industrial alcohol).

## Product image



## Dimensions

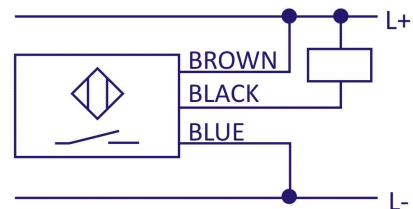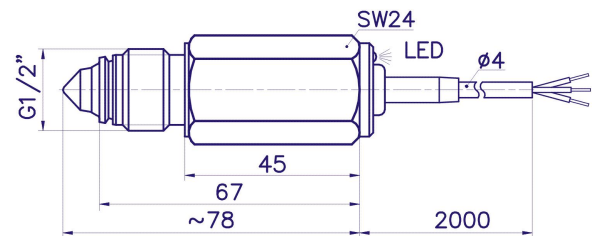

## Company Head Office Telephone

PLOSKON AT s.r.o. +421 / (0)51 7732 836  
Jesenná 1 +421 / (0)51 7731 003  
080 01 Prešov  
Slovak Republic

## E-mail

obchod@ploskon.sk

## Website

www.ploskon.sk

## Billing information

PLOSKON AT s.r.o.  
IČO:36483354  
DIČ:2020009860